

H 7i VIO

Compactor with VIO-drum


Compactors Series H CompactLine / Series H222









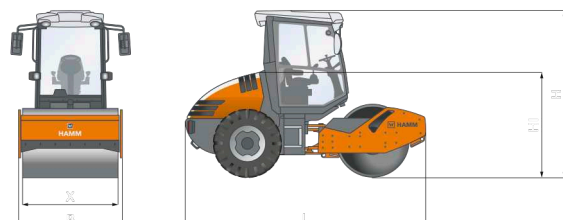




HIGHLIGHTS H CompactLine

- > Three-point swivel joint for optimum driving comfort
- > Optimum ease of maintenance, long service intervals
- > Ergonomic driver platform
- > Maximum climbing ability and generous angle of slope
- > Compact design for perfect all-round visibility
- > Clear information and operating display

Machine dimensions		
Total length (L)	mm	4409
Width (B)	mm	1844
Total height (H)	mm	2925
Drum width (X)	mm	1680
Height loading, min. (HI)	mm	2925



TIER 4
EU Stage
IIIB / EPA
Tier 4

TECHNICAL DATA		Unit	H 7i VIO
	Weights		
	Operating weight with cab	kg	6325
	Operating weight with ROPS	kg	6105
	Operating weight, max.	kg	6380
	Axle load, front/rear	kg	3765/2560
	Static linear load, front	kg/cm	22,4
	Machine dimensions		
	Total length	mm	4409
	Total height with cab	mm	2925
	Height loading, min.	mm	2925
	Wheel base	mm	2306
	Total width with cab	mm	1844
	Ground clearance, centre	mm	317
	Turning radius, inside	mm	3310
	Angle of driving slope, front/rear	°	38/42
	Drum dimensions		
	Drum width, front	mm	1680
	Drum diameter, front	mm	1206
	Drum thickness, front	mm	20
	Drum type, front		smooth
	Wheel dimensions		
	Size of tyres, rear		AW 14.9-24 8 TL
	Diesel engine		
	Manufacturer		KUBOTA
	Version		V3307-CR-T
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		54,6/74,3/2200
	Power rating SAE J1349, kW/HP/rpm		54,6/73,2/2200
	Emissions standard EU/USA		EU Stage IIIB / EPA Tier 4
	Exhaust gas after-treatment		DOC-DPF
	Drive		
	Speed, working gear	km/h	0-6,0
	Speed, transportation gear	km/h	0-12,5
	Climbing ability, vibration on/off	%	55/60
	Vibration		
	Vibration frequency	Hz	36
	Amplitude, vibration	mm	1,38
	Centrifugal force, vibr.	kN	123
	Oscillation		
	Oscillation force	kN	123
	Oscillation frequency	Hz	36
	Tangential amplitude, oscillation	mm	1,37
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	123
	Sound level		
	Acoustic power LW(A), sticker		104
	Acoustic power LW(A), measured		103

EQUIPMENT

2 large working and rear view mirrors, 3-point articulation, Tray behind the driver's seat, Storage bin under the driver's seat, Trays, Anti-slip control, Dashboard with displays, indicator lights and switches, Fixture for cold box, ECO mode, Spring-mounted driver's seat with armrest and safety belt, Cup holder, Large angle of driving slope at front and rear, Hose protection on front vehicle, Vibration-isolated operator's platform, Maintenance points, central on one machine side, ROPS, rigid

OPTIONAL EQUIPMENT

Working lights, Back-up alarm (reversing), Frequency display, vibration, Speedometer, HAMM Compaction Meter, Air conditioning, Radio, Rotating beacon, Protective roof, Automatic vibration system, Rear area camera, HCQ Navigator, Telematics interface, Safety belt monitoring device, Automatic engine-off function, ROPS cabin with heating and doors to the left and right, FOPS-approved (level I), ROPS cabin with heating and door to the left, FOPS-approved (level I), Seat adjustment, right / left, Driver's seat with high backrest, anthracite cloth, comfort equipment, Steering column, tiltable

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

